

# BEDARRA 100

## BI-FOLD DOOR



### FEATURES AND BENEFITS OF THE BEDARRA 100mm BI-FOLD DOOR INCLUDE:

The Bedarra 100mm Bifold Door features large panels, this ensures more uninterrupted views without sacrificing strength and safety.

Quality marine grade stainless steel hardware is used to ensure product longevity and performance in the harshest of conditions.

Utilising quality seals, the Bedarra will meet the highest demands for energy efficiency and weather performance in today's market.

The sill is reversible allowing for inward and/or outward opening.

Additional features include: multi-point locking hardware for better security, and a dust seal on head tracks reducing wear and corrosion. It is also available in a low profile sill for easy access applications.

Frame widths available: 100mm.

### PERFORMANCE

#### STRUCTURAL PERFORMANCE (UP TO)

- + Serviceability Limit State Wind Pressure: 1500Pa max
- + Ultimate Limit State Wind Pressure: 4000Pa max
- + Water Penetration Resistance Pressure: 330Pa max

#### MAXIMUM RECOMMENDED SIZE (UP TO)

- + Height: 3000mm
- + Width: 1000mm (sash width)
- + Weight: 60kg

#### GLAZING MAXIMUM THICKNESS (UP TO)


- + Single Glazed: 10.76mm
- + Double Glazed: 22mm

#### ACOUSTICS (UP TO)

- + Bi-fold Door: RW (C:Ctr): up to 33 (-1:-2)

SINGLE GLAZED - TOTAL WINDOW AFRC				
	Uw	SHGC	Tvw	Air Inf
WAS-021-06 6.38mm Clear Laminate	5.9	0.57	0.61	1.0
WAS-021-05 6.38mm Grey Laminate	5.9	0.45	0.29	1.0
WAS-021-04 6.38mm ComfortPlus Clear	4.4	0.49	0.57	1.0

DOUBLE GLAZED - TOTAL WINDOW AFRC				
	Uw	SHGC	Tvw	Air Inf
WAS-022-04 4mm Clear/ 8mm Argon/ 4mm Clear	3.9	0.54	0.56	1.0
WAS-022-06 4mm Clear/ 8mm Argon/ 4mm EnergyTech	3.4	0.51	0.52	1.0
WAS-022-01 Viridian LightBridge Clear SO 4/8/4	3.2	0.42	0.55	1.0

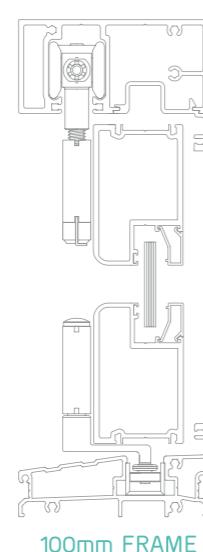

100mm FRAME

### CONFIGURATIONS - VIEW FROM OUTSIDE

