

FLINDERS

DOUBLE GLAZED SLIDING WINDOW



FEATURES AND BENEFITS OF THE FLINDERS SLIDING WINDOW INCLUDE:

Hollow mullion and transom for stability and strength. Heavy duty double rollers for smoother operation and longevity.

No internal projection of transom and sash sections.

Wintec Systems handles are ergonomically designed for ease of use for the elderly and disabled.

The handles operate in the direction of the sash movement and are available in four colours.

Additional options include:
Multi-position vent locking, standard or barrel key locking, insect or security screens.

Frame widths available:
65mm can accommodate 16mm glazing.

PERFORMANCE

STRUCTURAL PERFORMANCE (UP TO)

- + Serviceability Limit State Wind Pressure: 3000Pa max
- + Ultimate Limit State Wind Pressure: 6000Pa max
- + Water Penetration Resistance Pressure: 330Pa max


MAXIMUM RECOMMENDED SIZE (UP TO)

- + Height: 1550mm
- + Height with low light: 2750mm
- + Width: 3000mm

GLAZING MAXIMUM THICKNESS (UP TO):

- + Double Glazed: 16mm

65MM SLIDING WINDOW - TOTAL WINDOW AFRC				
	Uw	SHGC	Tvw	Air Inf
WAS-004-04 4mm Clear/ 8mm Argon / 4mm Clear	3.9	0.63	0.66	0.8
WAS-004-05 4mm Clear/ 8mm Argon / 4mm EnergyTech	3.3	0.59	0.61	0.8
WAS-004-08 4mm Grey/ 8mm Argon / 4mm EnergyTech	3.3	0.42	0.38	0.8

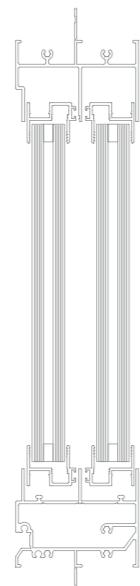

65mm FRAME

CONFIGURATIONS - VIEW FROM OUTSIDE

